



## Solenoid Driver KFD2-SL2-Ex2.B

- 2-channel isolated barrier
- 24 V DC supply (Power Rail)
- Output 45 mA at 11.7 V DC
- Logic input, non-polarized
- Up to SIL 2 acc. to IEC 61508




SIL 2



### Function

This isolated barrier is used for intrinsic safety applications. The device supplies power to solenoids, LEDs and audible alarms located in a hazardous area. It is controlled via logic signals. The inputs have two defined states: 1-Signal = 16 V DC ... 30 V DC, 0-Signal = 0 V DC ... 5 V DC. The current consumption of the input is about 3 mA. At full load, 11.7 V at 45 mA is available for the hazardous area application.

### Connection

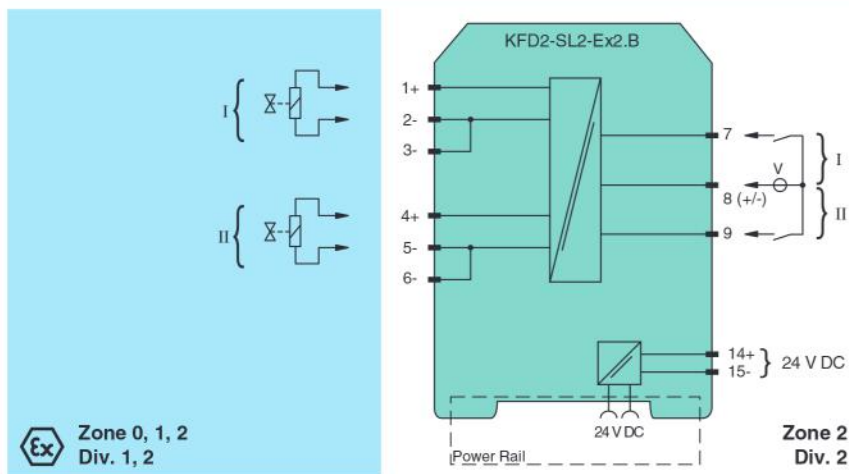

Release date: 2021-08-05 Date of issue: 2021-08-05 Filename: 184259\_eng.pdf

### Technical Data

<b>General specifications</b>	
Signal type	Digital Output
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 2
<b>Supply</b>	
Connection	Power Rail or terminals 14+, 15-
Rated voltage	$U_r$ 20 ... 30 V DC
Power consumption	max. 3.3 W at 45 mA output current
<b>Input</b>	
Connection side	control side
Connection	terminals 7, 8, 9

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

## Technical Data

Input current		approx. 3 mA at 24 V DC
Signal level		1-signal: 16 ... 30 V DC 0-signal: 0 ... 5 V DC
<b>Output</b>		
Connection side		field side
Internal resistor	$R_i$	272 $\Omega$
Current	$I_e$	$\leq 45$ mA
Voltage	$U_e$	$\geq 11.7$ V
Open loop voltage	$U_o$	min. 24 V
Connection		terminals 1+, 2-, 3- channel 1 , terminals 4+, 5-, 6- channel 2
Output rated operating current		45 mA
Output signal		These values are valid for the rated operating voltages from 20 ... 30 V DC.
Energized/De-energized delay		$\leq 20$ ms / $\leq 20$ ms
<b>Galvanic isolation</b>		
Input/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Input/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Power supply/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LEDs
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
Protection against electrical shock		EN 61010-1:2010
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 50 °C (-4 ... 122 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		ZELM 00 ATEX 0024
Marking		Ⓜ II (1)G [Ex ia Ga] IIC Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I
Output		Ex ia
Voltage	$U_o$	28 V
Current	$I_o$	110 mA
Power	$P_o$	770 mW (linear characteristic)
<b>Supply</b>		
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.)
<b>Input</b>		
Maximum safe voltage	$U_m$	60 V (Attention! The rated voltage can be lower.)
<b>Collective error message</b>		
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.)
Certificate		TÜV 02 ATEX 1820 X
Marking		Ⓜ II 3G Ex nA IIC T4 Gc
Galvanic isolation		

Release date: 2021-08-05 Date of issue: 2021-08-05 Filename: 184259\_eng.pdf