



Zener Barrier

Z787.F



- 2-channel
- DC version, positive polarity
- Working voltage 26.5 V at 10 μ A
- Series resistance max. 341 Ω
- Fuse rating 50 mA
- DIN rail mounting
- Replaceable back-up fuse
- With diode return



Function

The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area. The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has a positive polarity, i. e. the anodes of the zener diodes are grounded. Additionally this Zener Barrier is equipped with a replaceable fuse. The Zener Barrier is for evaluation of signals from the hazardous area. The diodes of diode return prevent a current into the hazardous area, therefore the current assumption for intrinsic safety calculations is zero. Depending on the application, increased or decreased intrinsic safety parameters apply for serial or parallel connection. For the detailed parameters refer to the Zener Barrier certificate. Application examples can be found in the system description of the Zener Barriers.

Connection

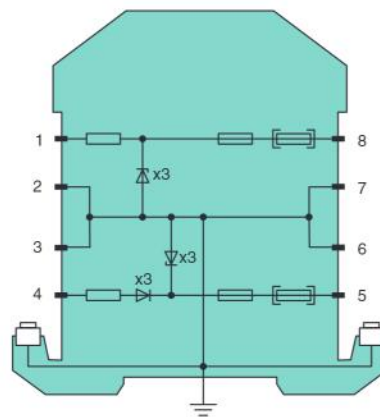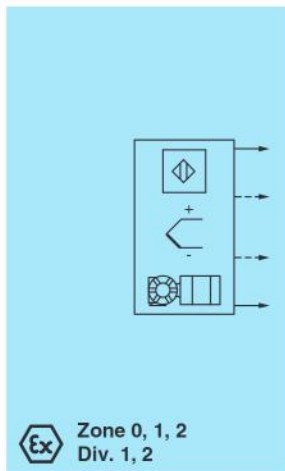

Zone 2
Div. 2

Technical Data

General specifications

Type DC version, positive polarity

Electrical specifications

Nominal resistance 300 Ω
 Series resistance max. 341 Ω
 Fuse rating 50 mA

Hazardous area connection

Connection terminals 1, 2; 3, 4

Safe area connection

Release date: 2021-03-22 Date of issue: 2021-03-22 Filename: 072178_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Connection	terminals 5, 6; 7, 8		
Working voltage			
Supply loop	max. 27 V		
Measurement loop	max. 26.5 V at 10 μ A		
Conformity			
Degree of protection	IEC 60529		
Ambient conditions			
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)		
Storage temperature	-25 ... 70 °C (-13 ... 158 °F)		
Relative humidity	max. 75 % , without condensation		
Mechanical specifications			
Degree of protection	IP20		
Connection	screw terminals		
Core cross-section	max. 2 x 2.5 mm ²		
Mass	approx. 150 g		
Dimensions	12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 inch)		
Construction type	modular terminal housing , see system description		
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001		
Data for application in connection with hazardous areas			
EU-type examination certificate	BAS 00 ATEX 7096		
Marking	Ⓢ II (1)GD, [Ex ia Ga] IIC, [Ex ia Da] IIIC, (-20 °C ≤ T _{amb} ≤ 60 °C) [circuit(s) in zone 0/1/2]		
Voltage	U _o	28 V	
Current	I _o	93 mA	
Power	P _o	650 mW	
Supply			
Maximum safe voltage	U _m	250 V	
Series resistance	min. 301 Ω		
Certificate	TÜV 99 ATEX 1484 X		
Marking	Ⓢ II 3G Ex nA II T4 [device in zone 2]		
Directive conformity			
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010		
International approvals			
FM approval			
Control drawing	116-0118		
UL approval			
Control drawing	116-0355 (cULus)		
IECEX approval			
IECEX certificate	IECEX BAS 18.0033		
IECEX marking	[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I		
General information			
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .		

Release date: 2021-03-22 Date of issue: 2021-03-22 Filename: 072178_eng.pdf