



MTL4521 / MTL4521L

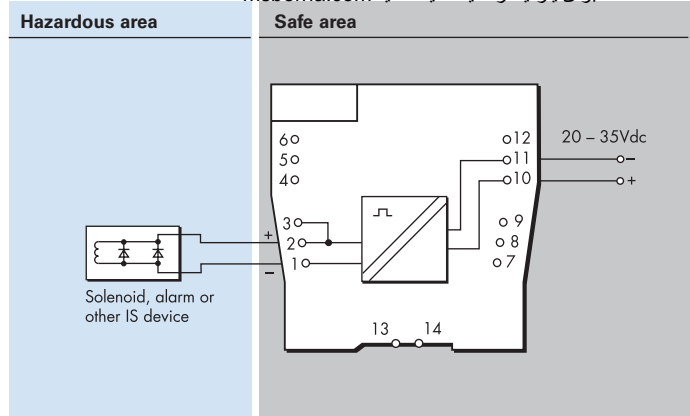

MTL5521

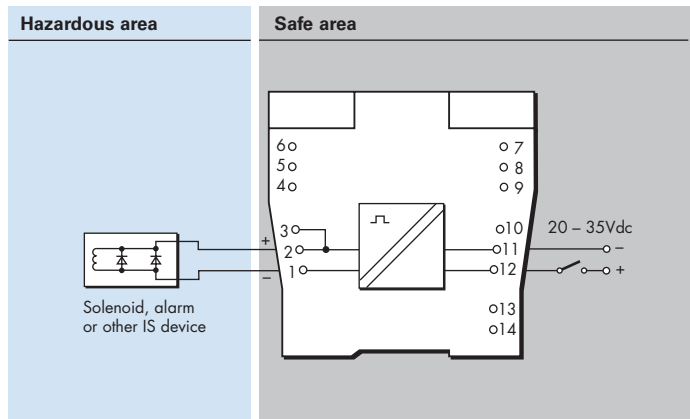

LED indicator

Yellow: output status, on when output active

Maximum current consumption

90mA at 24V

Power dissipation within unit

1.4W at 24V

Safety description (MTLx521)

$U_o=25V$ $I_o=147mA$ $P_o=0.92W$ $U_m = 253V$ rms or dc

Safety description (MTL4521L)

$U_o = 25V$ $I_o = 108mA$ $P_o = 0.68W$ $U_m = 253V$ rms or dc



SIL capable

These models have been assessed for use in IEC 61508 functional safety applications. SIL3 capable for a single device (HFT=0) when the required function is to de-energise the output. SIL1 capable for a single device (HFT=0) when the required function is to energise the output. See data on MTL web site and refer to the safety manual.

MTL4521/L – MTL5521
SOLENOID/ ALARM DRIVER
 loop-powered, IIC

The MTLx521 and the MTL4521L are loop-powered modules which enable a device located in the hazardous area to be controlled from the safe area. They can all drive a certified intrinsically safe low-power load, as well as non-energy-storing simple apparatus such as an LED.

SPECIFICATION

See also common specification




Number of channels

One


Location of load

Zone 0, IIC, T4-6 hazardous area if suitably certified
 Div. 1, Group A hazardous location


Minimum output voltage (MTLx521)




Equivalent output circuit (MTLx521)



Minimum output voltage (MTL4521L)



Equivalent output circuit (MTL4521L)



Input voltage

20 to 35V dc

Hazardous-area output (MTLx521)

Minimum output voltage: 13.6V at 48mA
 Maximum output voltage: 24V from 180Ω
 Current limit: 48mA minimum

Hazardous-area output (MTL4521L)

Minimum output voltage: 11.1V at 48mA
 Maximum output voltage: 24V from 232Ω
 Current limit: 48mA minimum

Output ripple

< 0.5% of maximum output, peak to peak

Response time

Output within 10% of final value within 100ms



Eaton Electric Limited,
 Great Marlings, Butterfield, Luton
 Beds, LU2 8DL, UK.
 Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
 E-mail: mtlenquiry@eaton.com
 www.mtl-inst.com

© 2017 Eaton
 All Rights Reserved
 Publication No.
 EPSx521 Rev8 040517

EUROPE (EMEA):
 +44 (0)1582 723633 mtlenquiry@eaton.com
THE AMERICAS:
 +1 800 835 7075 mtl-us-info@eaton.com
ASIA-PACIFIC:
 +65 6 645 9888 sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.